

POWER dot MINI

- 935-PM51W-GST
- 935-PM51-GST

- A** - Installation into round hole
- B** - Installation into tailored hole

CONTENT:



x1

x1

- 2 **USB Charger** (5V, 2.4A)
- 1 **GST18i3** *i*
Cable length according to order (max 1.2 m)



Revised 200214


1A **DRILL**
Drill a hole in the table.



Drill a hole

Ø51

2A **INSERT**
Insert Powerdot into the hole and feed the power plug through the table and the plastic fastening nut.

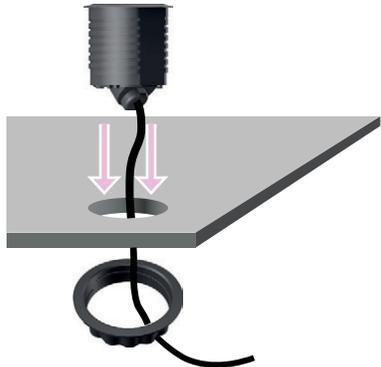


3A **TURN CLOCKWISE & PLUG IN**
Turn the plastic fastening nut as far up the thread as possible. Make sure it has been thoroughly tightened. Lastly, connect the GST18i3.

i Please read the information box.



30 mm maximum

1B **MILL**
Mill a hole in the table.

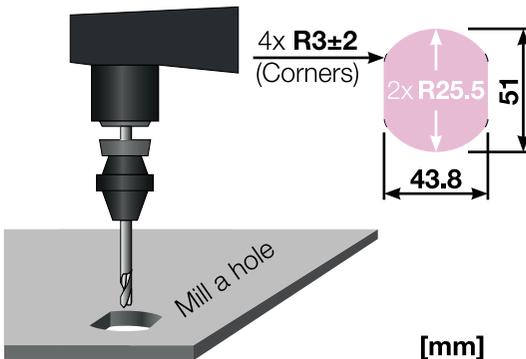

4x R3±2 (Corners)


2x R25.5

51

43.8

[mm]

2B **INSERT**
Insert Powerdot into the hole and feed the power plug through the table and the plastic fastening nut.

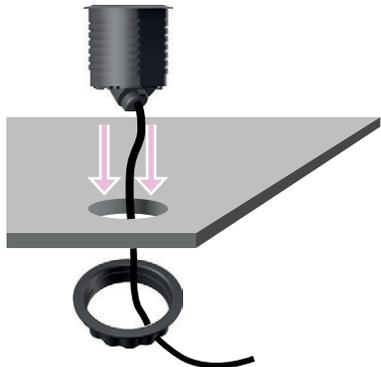


3B **TURN CLOCKWISE & PLUG IN**
Turn the plastic fastening nut as far up the thread as possible. Make sure it has been thoroughly tightened. Lastly, connect the GST18i3.

i Please read the information box.



30 mm maximum

i EN61535 **Note!** Product not grounded.



(2x) 1.5 mm²

□ Class II Isolation